



Video Recorder 400 Series



- ▶ **4-Channel real-time H.264 recording**
- ▶ **View and record video in CIF, 2CIF, or 4CIF resolution**
- ▶ **Built-in web viewer for remote viewing, playback, control, and configuration**
- ▶ **Supports VGA and analog monitor output (up to 1280x1024)**
- ▶ **Dual streaming for local recording and remote viewing**
- ▶ **Smart Search**
- ▶ **Bosch and third-party Pan/Tilt/Zoom camera control**

The Bosch Video Recorder 400 Series is a 4 channel digital recorder that uses the latest H.264 compression technology. With a built-in web server for browser-based video management, the 400 Series is a fully integrated, stand-alone video solution that's ready to go, straight out of the box.

Available in basic and advanced versions, the 400 Series features a highly reliable embedded design that minimizes maintenance and operational costs. The basic version provides one audio input, while the advanced version has four audio inputs and a DVD writer.

System Overview

The Bosch 400 Series takes advantage of the latest H.264 compression technology that allows for more efficient video compression. This reduces the amount of storage and bandwidth needed while also producing better image quality. The 400 Series records multiple video and audio signals while simultaneously providing live multi-screen viewing and playback. Comprehensive search and playback functions provide quick recall and viewing of recorded video.

Recording

Ease of use is key to the 400 Series design. Simply connect the cameras, apply power, and the unit begins recording automatically. All recording takes place in the background with no operator intervention required.

The use of H.264 compression reduces the file size of recordings by as much as 30% compared to standard MPEG-4, without sacrificing image quality. The Bosch Video Recorder 400 Series can record at up to 25 (PAL) / 30 (NTSC) images per second, per channel at CIF resolution. Recording at 2CIF and 4CIF resolution is also possible by reducing the recording image rate settings. The recording rate and quality are individually configurable per channel for maximum flexibility.

The recording archives are split into two partitions. Alarm recordings (input and motion) are stored on one partition, while continuous recordings are stored on a separate one. An overwrite mode can be selected separately for each partition if required.

Dome Control

The 400 Series can control pan/tilt/zoom (PTZ) equipment via RS-232 and RS-485 serial communications. PTZ devices, including the Bosch AutoDome Modular and AutoDome Easy II, are supported.

Alarms

All models have extensive alarm handling functions and telemetry control. Alarm functions include motion detection in user-definable areas of the image on any camera input.

Local control and operation

The unit can be easily operated and programmed via the on-screen display menu system using either the front panel control keys, the mouse, or the remote control. Two monitor outputs provide full-screen, quad (main monitor only), and sequenced viewing.

Looping auto-terminating video inputs and outputs, audio inputs and output, and alarm inputs and outputs are located on the rear panel. The VGA connector provides an output for monitor A (main monitor). A CVBS video output is also provided for monitor B (spot monitor). Monitor A displays live and playback in full-screen or quad digital pictures that can be frozen and zoomed. Monitor B displays live full-screen pictures.

Remote control and operation

Use the built-in web application via a network for live viewing, playback, and configuration; there is no need to install any additional software for viewing. Four users can control the Bosch 400 Series simultaneously.

The Bosch 400 Series includes an authenticity check for both local and remote playback, ensuring recording integrity. The Bosch 400 Series Archive Player is provided for playback of secure video files.

Functions

The Bosch 400 Series has the following features:


- 4 looped-through, auto-terminating camera inputs
- 1 or 4 audio inputs
- Simultaneous live viewing, recording, and playback
- 10/100Base-T Ethernet port for local or wide area network connection
- RS232 and RS485 serial port for serial communication
- VGA main monitor output plus CVBS for spot monitor
- Numerous VGA output quality settings
- Full-screen and Quad display capabilities in live and playback modes
- Playback one or more channels while showing live pictures of the other channels
- Spot monitor output with sequencing
- Audio output (mono)
- Motion detection
- Multiple search modes including smart search (search for motion within recorded images)
- 4 switching (alarm) inputs and 1 or 4 alarm outputs
- Video loss detection
- Audible alarm
- Pan, tilt, and zoom camera control via RS485/RS232
- Supports Bosch and Pelco protocols
- Local archiving via USB

- Local archiving via built-in DVD burner (advanced model)

Certifications and Approvals

Region	Certification	
Europe	CE	Declaration of Conformity
USA	FCC	Declaration of Conformity

Installation/Configuration Notes

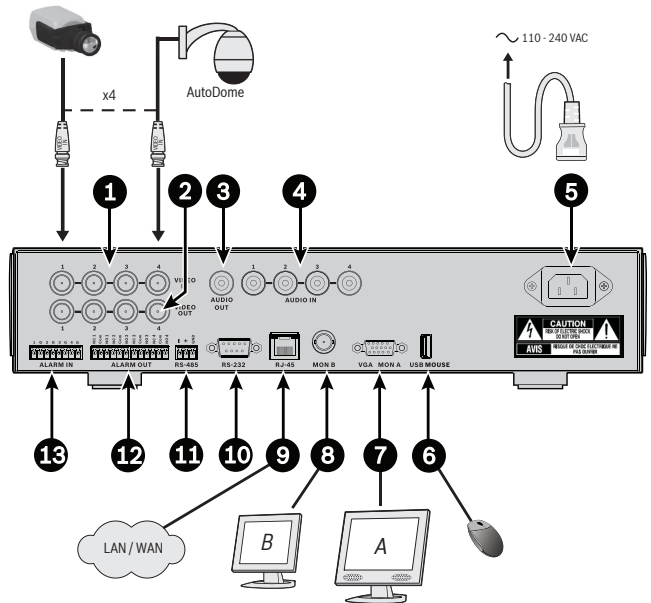

Connections on back of DVR 400 (Advanced version)

- | | |
|-------------------------|--------------------------------------|
| 1. Camera inputs | 8. Monitor B output |
| 2. Camera outputs | 9. RJ45 network connector |
| 3. Audio output | 10. RS232 connector |
| 4. Audio input(s) | 11. RS485 connector for Dome control |
| 5. Power connector | 12. Alarm output(s) |
| 6. USB mouse connector | 13. Alarm inputs |
| 7. Monitor A VGA output | |

Technical Specifications

Electrical

Rated Voltage and Power

Power input 120–230 VAC ±10%; 0.5 A; 50/60 Hz

Video

Video Standard	SVGA PAL / NTSC auto-detect
Live Resolution	SVGA: 800x600, 1024x768 or 1280x1024 PAL: 720x576, NTSC: 720x484
Digital Zoom	2 times
AGC	Automatic gain adjustment for each video input
Compression	H.264
Inputs	Composite video 1 Vpp, 75 ohm, automatic termination
Outputs	Monitor A: VGA RGB Monitor B: 1 Vpp, 75 ohm, sync. 0.3 V ±10%

Audio

Inputs	Mono RCA, 1.0 Vpp
Output	Mono RCA, 1.0 Vpp
Compression	ADPCM
Sample rate	16 kHz per channel
Bit rate	8-bit

Alarm Handling

Inputs	4 Inputs configurable NO/NC, max input voltage 15 VDC
Outputs	1 or 4 Relay outputs, configurable NO/NC, max. rated 30 VAC, 30 VDC 0.5 A continuous

Control

RS232	Output signals according to EIA/TIA-232-F, max. input voltage ±25 V
RS232 Support	Bosch domes via RS232/Bi-phase converter
RS485	Output signals according to RS485, max. signal voltage -8 to +12 V
RS485 Support	Bosch domes, and Pelco P and D

Connectors

Video Inputs	4 Looping BNC, auto termination
Monitor	1 VGA d-SUB, 1 BNC
Alarm connectors	Screw terminal inputs, cable diameter AWG26-16 (0.13-1.5 mm)
Audio Inputs	1 or 4 RCA (CINCH)
Audio Output	1 RCA (CINCH)
Ethernet	RJ45, 10/100 BaseT according to IEEE802.3
RS232	DB9 Male
RS485	Screw terminal output, cable diameter AWG28-16 (0.08-1.5 mm)
USB	Type A Connector USB 1.1 on rear for mouse USB 2.0 on front for mouse or USB memory device

Storage

Hard Disk	1 SATA hard drive
-----------	-------------------

Video recording

Record Rate (IPS)	
NTSC	Max. 30 IPS per channel, configurable: 30, 15, 7.5, 5, 3, 1
PAL	Max. 25 IPS per channel, configurable: 25, 12.5, 6.25, 5, 2.5, 1
Recording Quality	Best, High, Normal, Low, Lowest
Average Recording Capacity	
CIF, Normal, 25/30 IPS	PAL: 550 Hours, NTSC: 685 Hours
CIF, Normal, 6.25/7.5 IPS	PAL: 1400 Hours, NTSC: 1700 Hours
2CIF, Normal, 12.5/15 IPS	PAL: 460 Hours, NTSC: 575 Hours
4CIF, Normal, 6.25/7.5 IPS	PAL: 370 Hours, NTSC: 460 Hours

Maximum recording rates

Local Stream 4 channels	
4CIF	PAL: 6 IPS, NTSC: 7.5 IPS
2CIF	PAL: 12.5 IPS, NTSC: 15 IPS
CIF	PAL: 25 IPS, NTSC: 30 IPS
Local Stream 2 channels	
4CIF	PAL: 12.5 IPS, NTSC: 15 IPS
2CIF	PAL: 25 IPS, NTSC: 30 IPS
CIF	PAL: 25 IPS, NTSC: 30 IPS
Local Stream 1 channel	
4CIF	PAL: 25 IPS, NTSC: 30 IPS
2CIF	PAL: 25 IPS, NTSC: 30 IPS
CIF	PAL: 25 IPS, NTSC: 30 IPS
Remote (network) Stream 4 channels	
CIF	PAL: 12.5 IPS, NTSC: 15 IPS
Remote (network) Stream 2 channels	
CIF	PAL: 25 IPS, NTSC: 30 IPS

Display Modes

Monitor A	Full, quad (live and playback), Full sequence, alarm call-up (live)
Monitor B	Full, full sequence, alarm call-up (live)

Recording Modes

Normal partition	Continuous recording (with or without overwriting)
Event partition	Input and motion recording (with or without overwriting)

Mechanical

Dimensions (WxDxH)	357 x 362 x 78 mm (14.1 x 14.2 x 3.1 in) excluding cabling
Weight	4.7 kg (10.34 lb) approx.

Environmental**Temperature**

- Operating	+0°C to +40°C (+32°F to +104°F)
- Storage	-40°C to +70°C (-40°F to +158°F)

Humidity

- Operating	<93% non-condensing
- Storage	<95% non-condensing

Electromagnetic compatibility**EMC requirements**

- USA	FCC Part 15, Class B
- EU	EMC Directive 89/336/EEC
	Immunity: EN50130-4
	Emission: EN55022 Class B
	Harmonics: EN61000-3-2
	Voltage fluctuations: EN61000-3-3

Safety

- USA	UL60950-1
- EU	CE, EN60950-1
- Can.	CAN/CSA-C2.2 no. 60950-1

Ordering Information

DVR-430-04A050 430 Series DVR **DVR-430-04A050**
430 Series DVR, 4 channel, 500 GB

DVR-451-04A050 451 Series DVR **DVR-451-04A050**
451 Series DVR, DVD, 4 channel, 500 GB

Americas:
Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: +31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific: **Represented by**
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6258 5511
Fax: +65 6571 2698
apr.securitysystems@bosch.com
www.boschsecurity.com