

DS-2CD3621G1-IZSUHK(2.7-13.5mm)



- High quality imaging with 2 MP resolution
- Efficient H.265+ compression technology
- Clear imaging against strong back light due to 120 dB true WDR technology
- -Z: motorized vari-focal lens for easy installation and monitoring
- -S: audio and alarm interface available
- Water and dust resistant (IP67) and vandal proof (IK10)
- Robust structure design with full metal materials



▪ Specification











Selection Parameter	
Min. Illumination	0.028 Lux
Local Storage	128 GB
Protection Level	IP67
Wi-Fi Support	No
Case Type	Bullet
Resolution	2MP
Lens Type	Varifocal Lens
Video Compression	H.265+,H.265,H.264+,H.264
Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.01 Lux @(F1.2, AGC ON), 0.028Lux @(F2.0, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s
Slow Shutter	Yes
Wide Dynamic Range	120 dB
Day & Night	IR Cut Filter
Angle Adjustment	Pan: 0° to 360°, tilt: 0° to 100°, rotation: 0° to 360°
Lens	
Focus	-Z: Auto,Without -Z: Manual
Lens Type	2.7 to 13.5 mm
FOV	Horizontal FOV: 99.6° to 35°, vertical FOV: 53.5° to 20°, diagonal FOV: 118.6° to 40.2°
Aperture	F2.0
Lens Mount	Φ14
Aperture Type	Fixed
Illuminator	
IR Range	Up to 60 m
Wavelength	850nm
Video	
Max. Resolution	1920 × 1080
Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280 × 720),60Hz: 30fps (1920 × 1080, 1280 × 960, 1280 × 720)
Sub Stream	1080P@12FPS 50Hz: 25fps (640 × 480, 640 × 360, 320 × 240),60Hz: 30fps (640 × 480, 640 × 360, 320 × 240)
Third Stream	1fps (352 × 240, 320 × 240)
Video Compression	Main stream: H.265/H.264,Sub-stream: H.265/H.264/MJPEG
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
H.264+	Main stream supports, Sub-stream supports
H.265+	Main stream supports, Sub-stream supports
Region of Interest (ROI)	1 fixed region for main stream
Audio	
Environment Noise Filtering	Yes
Audio Sampling Rate	8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
Audio Compression	G.711/G.722.1/G.726/MP2L2/PCM
Audio Bit Rate	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)
Network	
Simultaneous Live View	Up to 6 channels
API	ONVIF (PROFILE S, PROFILE G), ISAPI
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP™, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, Bonjour
User/Host	Up to 32 users,3 levels: Administrator, Operator and User
Network Storage	Support built-in microSD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR
Client	iVMS-4200, Hik-Connect, iVMS-5200, iVMS-4500
Web Browser	IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error

Image	
Day/Night Switch	Day/Night/Auto/Schedule/Triggered by alarm in (-S)
Target Cropping	No
DNR	3D DNR
Image Enhancement	BLC/3D DNR, HLC
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or web browser
Interface	
Audio	1 input (line in), 1 output (line out), mono sound
Alarm	2 inputs, 2 outputs
Video Output	CVBS
On-board Storage	Built-in micro SD/SDHC/SDXC slot, up to 128 GB
Hardware Reset	Yes
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Smart Feature-Set	
Smart Event	Line crossing detection, intrusion detection
General	
Firmware Version	V5.5.6
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter
Startup and Operating Conditions	-30 °C to +60 °C (22 °F to +140 °F), humidity 95% or less (non-condensing)
Power Supply	12 VDC ± 25%, Φ 5.5 mm coaxial plug power, PoE (802.3af, class 3)
Power Consumption and Current	-Z:, 12 VDC, 0.9 A, max. 11 W, PoE: (802.3af, 36V-57V), 0.4 A to 0.2 A, max. 12.9 W, Without -Z:, 12 VDC, 0.6 A, max. 7W, PoE: (802.3af, 36V-57V), 0.3 A to 0.1 A, max. 9 W
Camera Material	Metal
Camera Dimension	Φ 105 × 294.5 mm (Φ 4.1" × 11.6")
Camera Weight	Camera: approx. 1050 g (2.3 lb.), With package: approx. 1500 g (3.3 lb.)
Approval	
Protection	IK10, IP67

▪ **Accessory**


▪ **Optional**

DS-1275ZJ-SUS	DS-1275ZJ-S-SUS	DS-1260ZJ	DS-1280ZJ-S	DS-1276ZJ-SUS
Vertical pole mount	Vertical pole mount	Junction box	Junction box	Corner mount

*
o

Distributed by

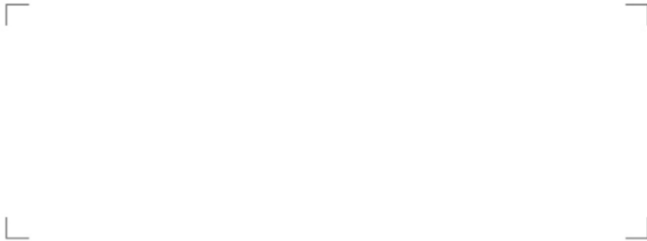

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA

T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia

T +61-2-8599-4233
salesau@hikvision.com

Hikvision India

T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada

T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand

T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe

T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy

T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil

T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey

T +90 (216)521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia

T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland

T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa

Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France

T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan

T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam

T +84-974270888
sales.vt@hikvision.com

Hikvision UAE

T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore

T +65-6684-4718
sg@hikvision.com

Hikvision Spain

T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent

T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong

T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia

T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea

T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland

T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia

T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia

sales.colombia@hikvision.com