

VB-H751LE

High-specification wide-angle IR bullet camera ideal for use in extreme temperatures and zero-light conditions.


Featuring full HD image capture, extensive weather resistance, on-board analytics and stunning low-light imaging.



- 1/3" CMOS sensor for Full HD imaging and outstanding low-light performance
- Built-in infrared LEDs provides detailed monochrome images up to 30m
- IP66 and NEMA250 Type 4X compliance for protection from harsh environmental conditions
- Data size reducing and image optimising Motion Adaptive Noise Reduction and Area-specific Data Size Reduction (ADSR) technologies
- Intelligent alarm detection with 8 built-in analytic profiles
- Configuration and live streaming support across multiple web browsers and mobile devices
- ONVIF® Profile S and Profile G compliance

Product Range

VB-H761LVE
VB-H760VE
VB-H751LE
VB-M741VE
VB-M740E

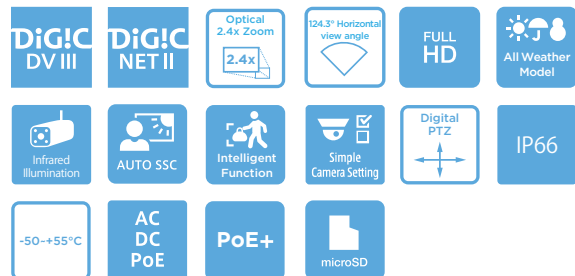

Technical Specifications

VB-H751LE

CAMERA	
Image Sensor	1/3 type CMOS (primary colour filter)
Number of Effective Pixels	Approx. 2.1 million pixels
Scanning Method	Progressive
Lens	2.4x optical zoom (4x digital zoom) lens (electric drive)
Focal Length	2.55 (W) - 6.12 mm (T)
F-number	F1.2 (W) - F1.8 (T)
Viewing Angle	For 16:9 aspect ratios: Horizontal: 124.3° (W) - 50.5° (T) Vertical: 66.9° (W) - 28.4° (T) For 4:3 aspect ratios: Horizontal: 90.6° (W) - 37.9° (T) Vertical: 66.9° (W) - 28.4° (T)
Day/Night Switch	Auto / Day Mode / Night Mode
Min. Subject Illumination	Day Mode (colour): 0.035 lux (F1.2, shutter speed 1/30 sec., SSC off, 50IRE) Night Mode (monochrome): 0 lux / 0.002 lux (F1.2, shutter speed 1/30 sec., when smart shade control is off, 50IRE with IR light on / off)
Focus	Auto / One-shot AF / Manual / Fixed at infinity
Shooting Distance (from front of lens)	Day Mode: 0.3 m (12 in.) - infinity Night Mode: 0.3 m (12 in.) - infinity
Shutter Speed	1, 1/2, 1/4, 1/8, 1/15, 1/30, 1/50, 1/60, 1/100, 1/120, 1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/8000, 1/10000, 1/16000 sec.
Exposure	Auto / Auto (Flickerless) / Auto (Shutter-priority AE) / Auto (Aperture-priority AE) / Manual (Shutter Speed, Aperture, Gain)
White Balance	Auto / Light Source / Manual Light Source: Daylight Fluorescent / White Fluorescent / Warm Fluorescent / Mercury Lamp / Sodium Lamp / Halogen Lamp Manual: One-shot WB / R Gain / B Gain
Metering Mode	Center-Weighted / Average / Spot
Exposure Compensation	9 levels
Smart Shade Control	Auto / Manual / Disable Auto: 3 levels Manual: 7 levels - Brightens shaded areas of a video
Haze Compensation	Auto / Manual / Disable Auto: 3 levels Manual: 7 levels
AGC Limit	6 levels
Image Stabilizer	2 levels (digital)
Motion-Adaptive NR (Noise Reduction)	Available
IR Illumination Range	30 m (98.4 ft.) (When using 24 V AC, PoE+)
Pan Angle Range	344° (-217°-+127°)
Tilt Angle Range	93° (-3° - +90°) - Camera is at 0° when attached to the ceiling and facing straight down, and 90° when at a horizontal position
Rotation Angle Range	344° (±172°)
SERVER	
Video Compression Method	JPEG, H.264
Video Size	JPEG, H.264: 1920 x 1080, 960 x 540, 480 x 270 1280 x 720, 640 x 360, 320 x 180 1280 x 960, 640 x 480, 320 x 240
Video Quality	JPEG, H.264: 10 levels
Frame Rate	JPEG: 0.1 - 30 fps H.264: 1/2/3/5/6/10/15/30 fps - Values represent streaming performance from the camera. - The frame rate may be reduced due to Viewer computer's specs, the number of clients accessing at the same time, network loads, video quality setting, type or movement of the subject or other reasons. Maximum frame rate when used in the following combinations: When streaming H.264(1) (1920 x 1080) and H.264(2) (all sizes) simultaneously: 15 fps When streaming H.264(1) (all sizes) and H.264(2) (1920 x 1080) simultaneously: 15 fps When streaming H.264(1) (1280 x 960) and H.264(2) (1280 x 960) simultaneously: 15 fps When streaming H.264(1) (1280 x 720) and H.264(2) (1280 x 720) simultaneously: 15 fps
I-Frame Interval	0.5/1.1/1.5/2/3/4/5 sec.
Simultaneous Client Access	Max. 30 Clients + 1 Admin Client - H.264: Max. 10 Clients
Bit Rate Control	Target Bit Rate: 64/128/256/384/512/768/1024/1536/2048/3072/4096/6144/8192/10240/12288/14336/16384 kbps
ADSR: Area-specific Data Size Reduction	Number of Specified Areas: Max. 8 areas Data Size Reduction Level: 3 levels
Security	Camera Control: Administrator, Authorized user, Guest user (level of control varies depending on user) Access Control: User authority (user name and password), Host Access Restrictions (IPv4, IPv6) IEEE802.1X: EAP-MD5, EAP-TLS, EAP-TTLS, EAP-PEAP Encrypted Communications: SSL/TLS, IPsec
Protocol	IPv4, IPv6, TCP/IP, UDP, HTTP, FTP, SNMPv1/v2c/v3 (MIB2), DHCP, DNS, AutoIP, mDNS, ARP, ICMP, POP3, NTP, SMTP, RTP/RTCP, RTSP, SSL/TLS, IPsec, ONVIF, WV-HTTP (Canon proprietary)
Audio Compression Method	G.711 µ-law (64 kbps)

Audio Communication Method	Full-duplex (two-way)/half-duplex - Echo cancellation function compliant RTP, Sound Transfer Protocol by Canon
Audio File Playback	Available (audio files can be played back when an event is triggered by the intelligent function or external device input) - A third-party amplifier speaker is necessary
Privacy Mask	Number of registration: Max. 8 places, Number of mask colours: 1 (select from 9 colours)
Preset	Number of registers: Max. 20 positions (+Home Position) Number of Preset Tour Route: Max. 1
Intelligent Function (Video)	Moving Object Detection, Abandoned Object Detection, Removed Object Detection, Camera Tampering Detection, Passing Detection, and Intrusion Detection Detection Settings: Max. 15 Non-detection Area Settings: Available
Intelligent Function (Audio)	Volume Detection, Scream Detection
Event Trigger Type	External Device Input, Intelligent Function (Video), Intelligent Function (Audio), Timer, Day/Night Switch Number of Linked Events: 2 Linked Event Conditions: OR, AND (whether or not there is a sequence to events)
Image Upload	FTP/HTTP/SFTP (e-mail)
Event Notification	HTTP/SMP (e-mail)
Log Notification	SMTP (e-mail)
Image Cropping Function	Digital PTZ Cropping sizes: 640 x 360/512 x 288/384 x 216/256 x 144/128 x 72 640 x 480/512 x 384/384 x 288/256 x 192/128 x 96
On-Screen Display	Available German/English/Spanish/French/Italian/Polish/Russian/Turkish/Korean/Chinese (Simplified)/Japanese
Daylight Saving Time	Available
INTERFACE	
Network Terminal	LAN x 1 (RJ45, 100Base-TX (auto/full-duplex/half-duplex))
Audio Input Terminal	Φ3.5 mm (Φ0.14 in.) mini-jack connector (monaural) LINE IN (connect to an amplifier microphone) or MIC IN (connect to a microphone w/o amplifier) - Switch LINE IN/MIC IN in the Setting Page.
Audio Output Terminal (LINE OUT)	Φ 3.5 mm (Φ0.14 in.) mini-jack connector (monaural) LINE OUT (connect to an amplifier speaker)
External Device I/O Terminal	Input x 2, Output x 2
Memory Card	SD Memory Card, SDHC Memory Card, SDXC Memory Card Compatible. Recorded Content: Log, Video (Event, Manual, ONVIF, Timer, Upload) Frame Rate: Max. 1 fps (JPEG) Max. 30 fps (H.264) - To insure reliability in the recording speed, it is recommended to use CLASS 10 rated products. Even when using CLASS 10 products, reliability cannot be guaranteed during heavy access loads (e.g., when recording and deleting data at the same time).
OTHER	
Operating Environment	Temperature Operating Temperature Range (including direct sun exposure) AC, PoE+: -50°C - +55°C (-58°F - +131°F) DC, PoE: -10°C - +55°C (+14°F - +131°F) Start-up Temperature Range (including direct sun exposure) AC, PoE+: -30°C - +55°C (-22°F - +131°F) DC, PoE: -10°C - +55°C (+14°F - +131°F) Humidity 5% - 85% (without condensation)
Installation Method	Ceiling mount/Surface mount
Power Supply	PoE: PoE power supply via LAN connector (IEEE802.3at Type1/Type2 compliant) AC Adapter: PA-V18 (100 - 240 V AC) (sold separately) External power source: 24 V AC/12 V DC
Power Consumption	PoE+: Max. approx. 20.1 W*1 PoE: Max. approx. 10.2 W*2 AC Adapter PA-V18: Max. approx. 12.5 W (100 V AC) Max. approx. 12.6 W (240 V AC) DC: Max. approx. 11.2 W AC: Max. approx. 20.9 W *1 Class 4 power sourcing equipment (requests 30.0 W) *2 Class 0 power sourcing equipment (requests 15.4 W)
Dimensions	(H x W x D) 111 mm x 102 mm x 214 mm (4.37 x 4.02 x 8.43 in.) (camera body only) - Length when joint fully extended (D): 402 mm (15.83 in.)
Weight	Approx. 2600 g (5.74 lb.)
Dust-resistant/Waterproof Specification	IP66

Technical Specifications


VB-H751LE

International Standard	EN55032 Class A, FCC part15 subpart B Class A, ICES-003 Class A, VCCI Class A, RCM AS/NZS EN55032 Class A, CNS13438 Class A, KN32 Class A, EN55024, KN35, EN50581, EN62471 IEC/UL/EN 60950-1, IEC/UL/EN 60950-1/-22, EN50130-4, IEC/UL/EN 60529 IP66, NEMA 250 Type 4X
APPLICATION	
Viewer	Camera Viewer - Supports Video Display Rotation Mobile Camera Viewer
Camera software	Camera Management Tool Recorded Video Utility
Language	German/English/Spanish/French/Italian/Polish/Russian/Turkish/Thai/Korean/Chinese (Simplified)/Japanese
OPERATING SYSTEM/COMPATIBLE BROWSER	Windows 7, Internet Explorer 11/Chrome 65 Windows 8.1, Internet Explorer 11/Chrome 65 Windows 10, Internet Explorer 11/Microsoft Edge/Chrome 65 Windows Server 2008, Internet Explorer 9 Windows Server 2008 R2, Internet Explorer 11/Chrome 65 Windows Server 2012, Internet Explorer 10/Chrome 65 Windows Server 2012 R2, Internet Explorer 11/Chrome 65 Windows Server 2016, Internet Explorer 11/Chrome 65
Verified Mobile Devices	Surface, iPad, iPhone, Nexus, Galaxy

What's in the box?

- VB-H751LE Main Unit
- Before Using this Camera
- EAC-Supported Guide
- Safety Wire
- Safety Wire Fixing Screw
- Ceiling Plate
- Ceiling Plate Fixing Screw *4
- Wrench
- Template
- Multi Cable with Waterproof Rubber Seal (IO/Audio/Power)
- Waterproofing Tape
- LAN Cable Cap
- Waterproof Rubber Seal for LAN Cable
- Zip Tie
- Packing Attachment
- GND Screw
- Installation Guide
- Warranty Card

Dimensions

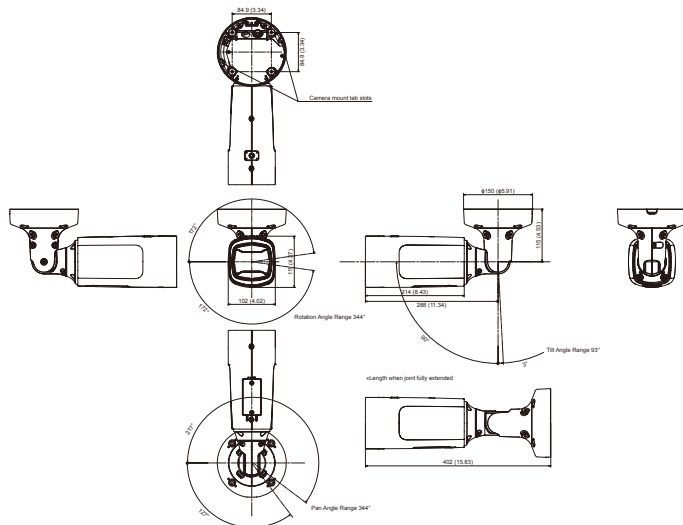

All dimensions are in mm (in.)

Compatible Accessories



CB740-VB
Conduit Box



PC640-VB
Pendant Mounting Kit



PA-V18
AC Power Supply
*Available in Euro 2-Pin & UK 3-Pin plug

High-specification wide-angle IR bullet camera ideal for use in extreme temperatures and zero-light conditions.

VB-H751LE



Featuring full HD image capture, extensive weather resistance, on-board analytics and stunning low-light imaging.

Sales Start Date: December 2016

Product Details:

Product Name	Mercury Code	EAN Code
Network Camera VB-H751LE	1386C001AC	4549292078350

Optional Accessories:

Product Name	Mercury Code	EAN Code
Pendant Mounting Kit PC640-VB	0719C001AA	4549292043532
Conduit Box CB740-VB	0712C001AA	4549292043464
AC Adapter PA-V18 (E)	8362B002AA	4960999986791
AC Adapter PA-V18 (GB)	8362B003AA	4960999986319

Measurement / Logistic Information:

Product Name	Mercury code	Pack type	Pack description	Quantity per pack	Length (mm)	Width (mm)	Height (mm)	Net Weight (kg)	Gross Weight (kg)
Network Camera VB-H751LE	1386C001AC	EA	Each	1	238	468	240	2.6	4.5
		CT	Carton	2	488	502	274	5.1	
		EP	Euro Pallet	12				30.6	