

V3073-10K01E

NETWORK VIDEO RECORDER

Infinova[®]



FEATURES

- Supports 10-ch high-definition network video input and storage
- Supports S+265/ H.265/H.264 video format.
- S+265 compression effectively reduces the storage space and costs by up to 75%
- Supports 1-ch HDMI and 1-ch VGA output.
- HDMI Video output at up to 4K (3840x2160) resolution
- 1 SATA interface, up to 8TB for 1 HDD Support live view, storage, and playback of the connected camera at up to 6MP resolution
- 1×RJ45 self-adaptive 10/100 Mbps network interface
- VCA detection alarm is supported
- Web6 supports plug-in free browsing and can preview videos on all browsers
- Support cloud upgrade

The V3073-10K01E HD network video recorder is an HD surveillance and storage device that integrates HD video decoding technology, network technology and storage technology, supporting mainstream brand network cameras access. It can centrally manage the IP cameras, including configuration, information import/export, real-time information display, upgrade, etc.

The product can be widely used in professional safety and security surveillance areas of safe city, bank, smart transportation, smart building, hospital, school, community, factory etc.

TECHNICAL SPECIFICATIONS

Input	
Video Input	10-channel
Max Resolution	6MP
Two-way Audio Input	1-ch, 3.5mm
Bandwidth	Income 50Mbps; Outgoing 40Mbps
Output	
HDMI/VGA Output	HDMI 1-ch, 3840x2160, 1920x1080, 1280x720, 1024x768, 1366x768, 1440x900, 1280x800 VGA 1-ch, 1920x1080, 1280x720, 1024x768, 1366x768, 1440x900, 1280x800
Screen Split	1/3/4/5/6/7/8/9/10
Audio Output	-
Decoding	
Decoding Format	S+265/H.265/H.264
Recording Resolution	6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Capability	1*6MP, 1*5MP, 1*4MP, 1*3MP, 4*1080P, 8*720P, 10*4CIF
Synchronous Playback	1*6MP, 1*5MP, 1*4MP, 1*3MP, 3*1080P, 4*720P
Records Encryption	Yes
Hard Disk	
SATA	1 SATA interface for 1 HDDs
Capacity	Up to 8TB for each HDD
e SATA Interface	-
Array Type	N/A


External Interface	
Network Interface	1 RJ45 self-adaptive 10/100 Mbps network interface
USB Interface	2 x USB 2.0
Serial Interface	-
Alarm In/Out	-
Network	
Protocol	TCP/IP, ICMP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, UPnP, IGMP, QoS, IPV4, IPV6, Multicast, ARP, UDP, Telnet
System Compatibility	ONVIF (PROFILE S/T), SDK, P2P
General	
Web Version	Web6
Language	English
Operating Conditions	-10 ~ 55, 10% ~90% RH
Power Supply	DC12V 1.5A
Consumption (without HDD)	≤10W (without HDD)
Chassis	1U
Dimensions	42.9x200x199.5mm, (1.69x7.87x7.85 inch)
Weight (without HDD)	0.4Kg (0.88lb)
Certifications and Approval	
Product Certifications	CE, FCC

ORDERING INFORMATION

V3073-10K01E

Network Video Recorder, up to 10-channel input, support camera at up to 6MP resolution, support S+265/H.265/H.264, 1HDD slots, 1xRJ45 self-adaptive 10/100 Mbps network interface, HDMI and VGA simultaneous output, DC12V

PANEL VIEW

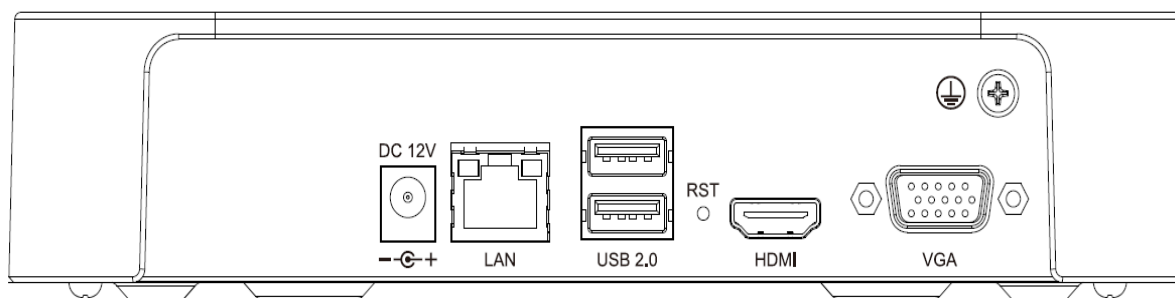

DIMENSIONS

